


STAGELINE

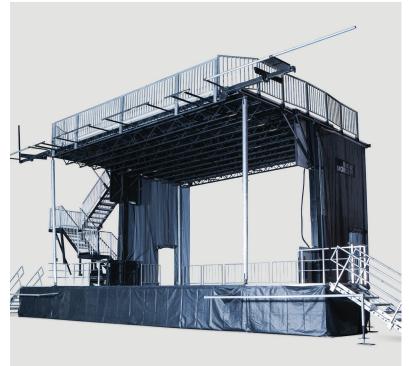

CONFIGURATION:

- Lower deck area of 770 sq. ft. (32'x24' up to 56' x 32' with plateforms)
- Upper deck area of 920 sq. ft. (34' x 27') Seating over 50 people
- SET UP TIME: 3 to 4 HOURS

- CERTIFIED BY PROFESSIONAL ENGINEERS IN **EVERY STATE AND PROVINCE**
 - WIND RESISTANCE: 90 MPH (145 KM/H) WITHOUT WINDWALLS 60 MPH (97 KM/H) WITH WINDWALLS
 - FULL HEIGHT RAINPROOF WINDWALLS ON 3 SIDES (Lower Level)









SPECIFICATIONS:

- Storage capacity: 8,000 lb (2,450 kg)
- Overall rigging capacity: 16,000 lbs 1,600 lb (726 kg)
- Screen support system: 16' x 14'- 4,500 lb each
- Overall height from ground: 22' to 24' (8.64m)
- Deck height: 3'- 6" to 5' (1.1m to 1.6m)

OPTIONS:

- One extra screen support
- Adjustable roof height
- Climate-controlled environment
- Tented tops (upper level)

ALL STANDARD EQUIPEMENT TRAVELS IN ONE TRAILER

- Deck: rated at 100lbs/sq.ft (490kg/m²)
- 4 rigging points, trusses and rigging bars 2" tubing
- 2 lateral banners supports : **up to** 6' x 16' (1.83m x 4.89m)
- Fire retardant windwalls for 3 sides
- Skirting
- Guardrails
- 1 stairway with handrails

