


SL 250 STAGELINE



- CONFIGURATION: 32'x24' (9.75M x 7.32M)
- SET UP TIME: 1 to 3 HOURS
- CERTIFIED BY PROFESSIONAL ENGINEERS IN EVERY STATE AND PROVINCE
- WIND RESISTANCE:
 90 MPH (145 KM/H) WITHOUT WINDWALLS
 60 MPH (97 KM/H) WITH WINDWALLS
- FULL HEIGHT RAINPROOF WINDWALLS ON 3 SIDES

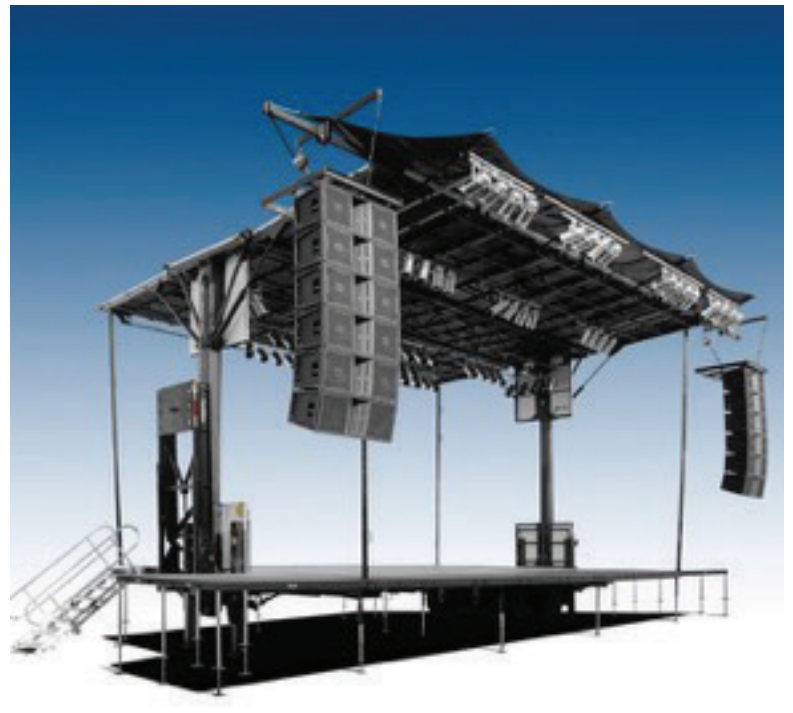

SPECIFICATIONS:

- Load bearing capacity: 17,500 lb (7,938 kg)
- Roof lifting capacity: 8,000 lb (3,626 kg)
- Roof maximum load capacity: 13,500 lb (6,123 kg)
- Sound wings load bearing capacity:
 4,000 lb (1,816 kg)
- Sound rig height: (max) 24'-8" (7,53m)
- Roof rig height: (from deck) 16'- 9" to 18'-1" (5,11m to 5,50m)
- Overall height from ground: 28' - 4' (8.64m)
- Deck height: 3'- 6" to 5' - 8" (1.1m to 1.6m)

OPTIONS:

- Tailored windwalls, scrim or mesh
- Sound wing cover
- Deck area can be increased using additional extension platforms
- Publicity space

ALL STANDARD EQUIPEMENT TRAVELS IN ONE TRAILER UNIT:

- Deck: rated at 100lb/sq.ft (490kg/m²)
- Roof: fiber glass bonded to steel
- 6 rigging points
- 4 overhang points
- 2 sound rigging extensions: 2,000 lb (907 kg) per side, except line array system system
- 2 sound wing areas: 8' x 8' (2,4 m to 2,4 m) with guardrails
- 1 rooftop banner support: up to 46' - 9" (14.25 x 1.32m)
- 2 lateral banners supports 3'- 6" to 5' - 8" (1.1m to 1.6m)
- Fire retardant windwalls for 3 sides
- Skirting
- Guardrails
- 1 stairway with handrails